







Nome Prog.	C080 ARIANO POLESINE				
Proponente	European Energy <i>Special Purpose Vehicle</i> Arian Solar S.r.l. Sede legale: Piazza San Sepolcro, 1 - 20123 Milano (MI) PEC: ariansolar@legalmail.it P.IVA: 13458950964				
Progettazione e Coordinamento	Ren Project S.r.l.  Ing. Leopoldo Franceschini Tel. 393 9404464 E-Mail: l.franceschini@renproject.it		St. Ambientale e Naturalistico	eambiente S.r.l.  Società soggetta ad attività di direzione e coordinamento di E3GROUP2010 S.r.l. Sede legale: Via delle Industrie, 5 - Marghera (Venezia) T. +39 041 8877708 contattaci@eambientesrl.com - www.eambientesrl.com	
Consulenza Ambientale	Filippo Tonion  Email: f.tonion@treeconsulting.eu Cell: 3270804005 P.IVA: 05489380260		Studio Progettazione connessione alla rete	GSB Consulting Srl  Sede legale: Via Ponte di Legno, 7 20134 Milano (MI) Cell. 373.7849614 Mail: gianandrea.bertinazzo@gsbconsulting.it P.IVA: 11882750968	
St. Geologico	GEODELTA S.R.L. S.T.P.  Centro Direzionale Villa Fini Via Roma 28 35010 - Limena (PD) info@geodelta.net - www.geodelta.net		Tecnico documentazione Prevenzione Incendi	Fabio Tellatin Ingegneria Ing. Fabio Tellatin Via Monte Pasubio,n. 17/A 35010 Curtarolo (PD) E-mail: fabio.tellatin@gmail.com Cell: 3295982540 PEC: fabio.tellatin@ingpec.eu	
Studio Agr.	Studio Agronomico Dott. Panizon Riccardo Via Toblino, 45 35142 Padova (PD) Cell. 348.382.75.76 PEO: riccardo.panizon@libero.it		Studio archeologico	Nike Servizi per l'Archeologia Dott. Nicola Bacci Via A.Cornaro,20 35020 Codevigo (PD) Email: nicolabacci@yahoo.it PEC: nicola.bacci@pec.it P.IVA 05104280283	
Scala	-----		Foglio	A4	
Ogg.	Schede Tecniche Componenti			COD.	T08
Opera	PROGETTO PER UN IMPIANTO AGRIVOLTAICO AVANZATO UBICATO NEL COMUNE DI ARIANO NEL POLESINE E RELATIVE OPERE DI CONNESSIONE NEI COMUNI DI ARIANO NEL POLESINE (RO), CORBOLA (RO), MESOLA (FE), CODIGORO (FE)				
Rel. 0.0	Data 02/02/2026	Progettista Ing. Leopoldo Franceschini		Data	Progettista
Rel.					
Rel.					

MV POWER STATION

2660-S2 / 2800-S2 / 2930-S2 / 3060-S2



MVPS-2660-S2 / MVPS-2800-S2 / MVPS-2930-S2 / MVPS-3060-S2



Robust

- Station and all individual components type-tested
- Optimally suited to extreme ambient conditions

Easy to Use

- Plug and play concept
- Completely pre-assembled for easy set-up and commissioning

Cost-Effective

- Easy planning and installation
- Low transport costs due to 20-foot skid

Flexible

- One design for the whole world
- DC-Coupling Ready
- Numerous options

MV POWER STATION 2660-S2 / 2800-S2 / 2930-S2 / 3060-S2

Turnkey Solution for PV Power Plants and large-scale storage systems

With the power of the new robust central inverters, the Sunny Central UP or Sunny Central Storage UP, and with perfectly adapted medium-voltage components, the new MV Power Station offers even more power density and is a turnkey solution available worldwide. Being the ideal choice for the new generation of PV power plants operating at 1500 VDC, the integrated system solution is easy to transport and quick to assemble and commission. The MVPS and all components are type-tested. The MV Power Station combines rigorous plant safety with maximum energy yield and minimized deployment and operating risk. The MV Power Station is prepared for DC coupling.

MV POWER STATION


2660-S2 / 2800-S2 / 2930-S2 / 3060-S2

Technical Data	MVPS 2660-S2	MVPS 2800-S2
Input (DC)		
Available inverters	1 x SC 2660 UP / 1 x SCS 2300 UP-XT	1 x SC 2800 UP / 1 x SCS 2400 UP-XT
Max. input voltage	1500 V	1500 V
Number of DC inputs	dependent on the selected inverters	
Integrated zone monitoring	○	
Available DC fuse sizes (per input)	200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A	
Output (AC) on the medium-voltage side		
Rated power at SC UP (at -25°C to +35°C / 40°C optional 50°C) ¹⁾	2667 kVA / 2400 kVA	2800 kVA / 2520 kVA
Charging power at SCS UP-XT (at -25°C to +25°C / 40°C optional 50°C) ¹⁾	2390 kVA / 2000 kVA	2515 kVA / 2100 kVA
Discharging power at SCS UP-XT (at -25°C to +25°C / 40°C optional 50°C) ¹⁾	2665 kVA / 2270 kVA	2800 kVA / 2380 kVA
Typical nominal AC voltages	10 kV to 35 kV	10 kV to 35 kV
AC power frequency	50 Hz / 60 Hz	50 Hz / 60 Hz
Transformer vector group Dy11 / YNd11 / YNy0	● / ○ / ○	● / ○ / ○
Transformer cooling methods	KNAN ²⁾	KNAN ²⁾
Transformer no-load losses Standard / Eco Design 1 / Eco Design 2	● / ○ / ○	● / ○ / ○
Transformer short-circuit losses Standard / Eco Design 1 / Eco Design 2	● / ○ / ○	● / ○ / ○
Max. total harmonic distortion	< 3%	
Reactive power feed-in (up to 60% of nominal power)	○	
Power factor at rated power / displacement power factor adjustable	1 / 0.8 overexcited to 0.8 underexcited	
Inverter efficiency		
Max. efficiency ³⁾ / European efficiency ³⁾ / CEC weighted efficiency ⁴⁾	98.7% / 98.6% / 98.5%	98.7% / 98.6% / 98.5%
Protective devices		
Input-side disconnection point	DC load-break switch	
Output-side disconnection point	Medium-voltage vacuum circuit breaker	
DC overvoltage protection	Surge arrester type I	
Galvanic isolation	●	
Internal arc classification medium-voltage control room (according to IEC 62271-202)	IAC A 20 kA 1 s	
General Data		
Dimensions (W / H / D)	6058 mm / 2896 mm / 2438 mm	
Weight	< 18 t	
Self-consumption (max. / partial load / average) ¹⁾	< 8.1 kW / < 1.8 kW / < 2.0 kW	
Self-consumption (stand-by) ¹⁾	< 370 W	
Ambient temperature -25°C to +45°C / -25°C to +55°C / -40°C to +45°C	● / ○ / ○	
Degree of protection according to IEC 60529	Control rooms IP23D, inverter electronics IP54	
Environment: standard / harsh	● / ○	
Degree of protection according to IEC 60721-3-4 (4C1, 4S2 / 4C2, 4S4)	● / ○	
Maximum permissible value for relative humidity	95% (for 2 months/year)	
Max. operating altitude above mean sea level 1000 m / 2000 m	● / ○	
Fresh air consumption of inverter	6500 m³/h	
Features		
DC terminal	Terminal lug	
AC connection	Outer-cone angle plug	
Tap changer for MV-transformer: without / with	● / ○	
Shield winding for MV-Transformer: without / with	● / ○	
Monitoring package	○	
Station enclosure color	RAL 7004	
Transformer for external loads: without / 10 / 20 / 30 / 40 / 50 / 60 kVA	● / ○ / ○ / ○ / ○ / ○ / ○ / ○	
Medium-voltage switchgear: without / 1 feeder / 3 feeders	● / ○ / ○	
2 cable feeders with load-break switch, 1 transformer feeder with circuit breaker, internal arc classification IAC A FL 20 kA 1 s according to IEC 62271-200	● / ○ / ○	
Short circuit rating medium voltage switchgear (20 kA 1 s / 20 kA 3 s / 25 kA 1 s)	● / ○ / ○	
Accessories for medium-voltage switchgear: without / auxiliary contacts / motor for transformer feeder / cascade control / monitoring	● / ○ / ○ / ○ / ○	
Integrated oil containment: without / with	● / ○	
Industry standards (for other standards see the inverter datasheet)	IEC 60076, IEC 62271-200, IEC 62271-202, EN50588-1, CSC Certificate	
● Standard features ○ Optional features – Not available		
Type designation	MVPS-2660-S2	MVPS-2800-S2

- 1) Data based on inverter. Further details can be found in the data sheet of the inverter.
 2) KNAN = Ester with natural air cooling
 3) Efficiency measured at inverter without internal power supply
 4) Efficiency measured at inverter with internal power supply

Technical Data	MVPS 2930-S2	MVPS 3060-S2
Input (DC)		
Available inverters	1 x SC 2930 UP / 1 x SCS 2530 UP-XT	1 x SC 3060 UP / 1 x SCS 2630 UP-XT
Max. input voltage	1500 V	1500 V
Number of DC inputs	dependent on the selected inverters	
Integrated zone monitoring	○	
Available DC fuse sizes (per input)	200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A	
Output (AC) on the medium-voltage side		
Rated power at SC UP (at -25°C to +35°C / 40°C optional 50°C) ¹⁾	2933 kVA / 2640 kVA	3067 kVA / 2760 kVA
Charging power at SCS UP-XT (at -25°C to +25°C / 40°C optional 50°C) ¹⁾	2635 kVA / 2200 kVA	2750 kVA / 2300 kVA
Discharging power at SCS UP-XT (at -25°C to +25°C / 40°C optional 50°C) ¹⁾	2930 kVA / 2495 kVA	3065 kVA / 2605 kVA
Typical nominal AC voltages	10 kV to 35 kV	10 kV to 35 kV
AC power frequency	50 Hz / 60 Hz	50 Hz / 60 Hz
Transformer vector group Dy11 / YNd11 / YNy0	● / ○ / ○	● / ○ / ○
Transformer cooling methods	KNAN ²⁾	KNAN ²⁾
Transformer no-load losses Standard / Eco Design 1 / Eco Design 2	● / ○ / ○	● / ○ / ○
Transformer short-circuit losses Standard / Eco Design 1 / Eco Design 2	● / ○ / ○	● / ○ / ○
Max. total harmonic distortion	< 3%	
Reactive power feed-in (up to 60% of nominal power)	○	
Power factor at rated power / displacement power factor adjustable	1 / 0.8 overexcited to 0.8 underexcited	
Inverter efficiency		
Max. efficiency ³⁾ / European efficiency ³⁾ / CEC weighted efficiency ⁴⁾	98.7% / 98.6% / 98.5%	98.7% / 98.6% / 98.5%
Protective devices		
Input-side disconnection point	DC load-break switch	
Output-side disconnection point	Medium-voltage vacuum circuit breaker	
DC overvoltage protection	Surge arrester type I	
Galvanic isolation	●	
Internal arc classification medium-voltage control room (according to IEC 62271-202)	IAC A 20 kA 1 s	
General Data		
Dimensions (W / H / D)	6058 mm / 2896 mm / 2438 mm	
Weight	< 18 t	
Self-consumption (max. / partial load / average) ¹⁾	< 8.1 kW / < 1.8 kW / < 2.0 kW	
Self-consumption (stand-by) ¹⁾	< 370 W	
Ambient temperature -25°C to +45°C / -25°C to +55°C / -40°C to +45°C	● / ○ / ○	
Degree of protection according to IEC 60529	Control rooms IP23D, inverter electronics IP54	
Environment: standard / harsh	● / ○	
Degree of protection according to IEC 60721-3-4 (4C1, 4S2 / 4C2, 4S4)	● / ○	
Maximum permissible value for relative humidity	95% (for 2 months/year)	
Max. operating altitude above mean sea level 1000 m / 2000 m	● / ○	
Fresh air consumption of inverter	6500 m³/h	
Features		
DC terminal	Terminal lug	
AC connection	Outer-cone angle plug	
Tap changer for MV-transformer: without / with	● / ○	
Shield winding for MV-Transformer: without / with	● / ○	
Monitoring package	○	
Station enclosure color	RAL 7004	
Transformer for external loads: without / 10 / 20 / 30 / 40 / 50 / 60 kVA	● / ○ / ○ / ○ / ○ / ○ / ○ / ○	
Medium-voltage switchgear: without / 1 feeder / 3 feeders	● / ○ / ○	
2 cable feeders with load-break switch, 1 transformer feeder with circuit breaker, internal arc classification IAC A FL 20 kA 1 s according to IEC 62271-200	● / ○ / ○	
Short circuit rating medium voltage switchgear (20 kA 1 s / 20 kA 3 s / 25 kA 1s)	● / ○ / ○	
Accessories for medium-voltage switchgear: without / auxiliary contacts / motor for transformer feeder / cascade control / monitoring	● / ○ / ○ / ○ / ○	
Integrated oil containment: without / with	● / ○	
Industry standards (for other standards see the inverter datasheet)	IEC 60076, IEC 62271-200, IEC 62271-202, EN50588-1, CSC Certificate	
● Standard features ○ Optional features – Not available		
Type designation	MVPS-2930-S2	MVPS-3060-S2

System diagram with Sunny Central UP

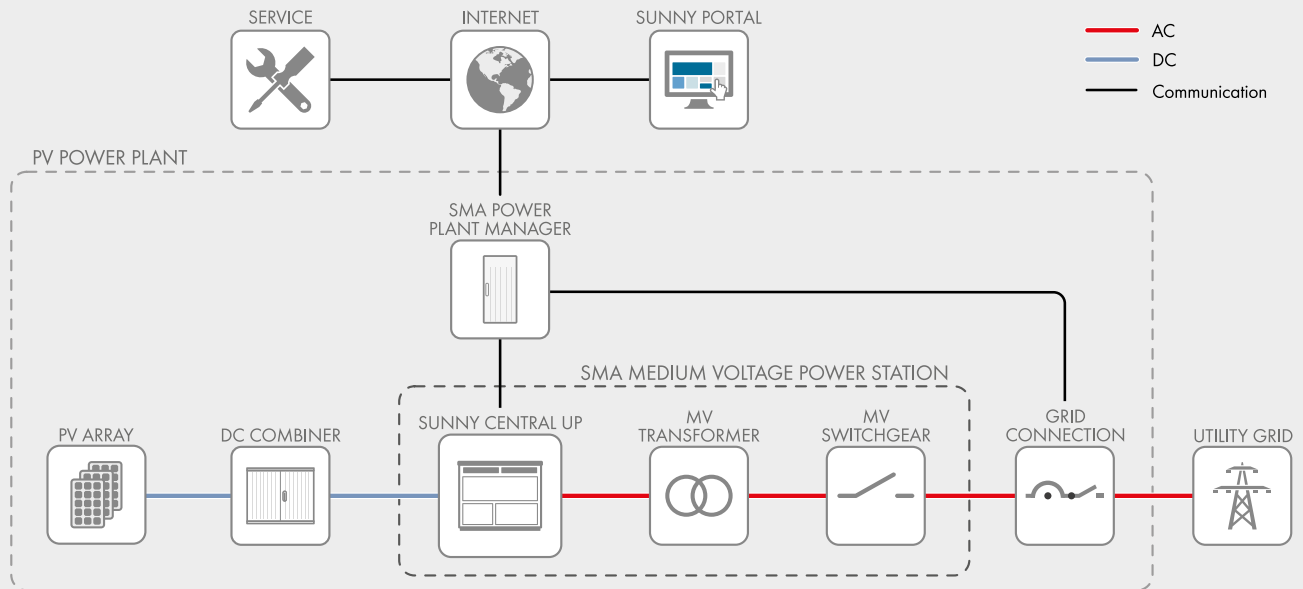



Sunny Central UP

The new Sunny Central: more power per cubic meter

Efficient

- Up to 4 inverters can be transported in one standard shipping container
- Overdimensioning up to 200% is possible
- Full power at ambient temperatures of up to 35°C

Robust

- Intelligent air cooling system OptiCool for efficient cooling
- Suitable for outdoor use in all climatic ambient conditions worldwide

Flexible

- One device for all applications
- PV application with DC-coupled battery-storage system and charging from the AC utility as an option

Easy to Use

- Improved DC connection area
- Connection area for customer equipment
- Integrated voltage support for internal and external loads

With an output of up to 3067 kVA and system voltages of 1500 V DC, the SMA central inverter allows for more efficient system design and a reduction in specific costs for PV and battery power plants.

A separate voltage supply and additional space are available for the installation of customer equipment. True 1500 V technology and the intelligent cooling system OptiCool ensure smooth operation even in extreme ambient temperature as well as a long service life of 25 years.

SUNNY CENTRAL UP


Technical Data	Sunny Central 2660 UP	Sunny Central 2800 UP
DC side		
MPP voltage range V_{DC} (at 35 °C / at 50 °C)	880 V to 1325 V / 1100 V	921 V to 1325 V / 1100 V
Min. DC voltage $V_{DC, min}$ / Start voltage $V_{DC, Start}$	849 V / 1030 V	891 V / 1071 V
Max. DC voltage $V_{DC, max}$	1500 V	1500 V
Max. DC current $I_{DC, max}$ / with DC coupling	3200 A / 4800 A	3200 A / 4800 A
Max. short-circuit current $I_{DC, SC}$	8400 A	8400 A
Number of DC inputs	Busbar with 26 connections per terminal, 24 double pole fused (32 single pole fused)	
Number of DC inputs with optional DC battery coupling	18 double pole fused (36 single pole fused) for PV and 6 double pole fused for batteries	
Max. number of DC cables per DC input (for each polarity)	2 x 800 kcmil, 2 x 400 mm ²	
Integrated zone monitoring	○	
Available PV fuse sizes (per input)	200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A	
Available battery fuse size (per input)	750 A	
AC side		
Nominal AC power at $\cos \varphi = 1$ (at 35 °C / at 50 °C)	2667 kVA / 2400 kVA	2800 kVA / 2520 kVA
Nominal AC active power at $\cos \varphi = 0.8$ (at 35 °C / at 50 °C)	2134 kW / 1920 kW	2240 kW / 2016 kW
Nominal AC current $I_{AC, nom}$ (at 35 °C / at 50 °C)	2566 A / 2309 A	2566 A / 2309 A
Max. total harmonic distortion	< 3% at nominal power	< 3% at nominal power
Nominal AC voltage / nominal AC voltage range ^{1) 8)}	600 V / 480 V to 720 V	630 V / 504 V to 756 V
AC power frequency / range	50 Hz / 47 Hz to 53 Hz 60 Hz / 57 Hz to 63 Hz > 2	
Min. short-circuit ratio at the AC terminals ⁹⁾	1 / 0.8 overexcited to 0.8 underexcited	
Power factor at rated power / displacement power factor adjustable ^{8) 10)}		
Efficiency		
Max. efficiency ²⁾ / European efficiency ²⁾ / CEC efficiency ³⁾	98.8% / 98.6% / 98.4%	98.8% / 98.6% / 98.4%
Protective Devices		
Input-side disconnection point	DC load break switch	
Output-side disconnection point	AC circuit breaker	
DC overvoltage protection	Surge arrester, type I & II	
AC overvoltage protection (optional)	Surge arrester, class I & II	
Lightning protection (according to IEC 62305-1)	Lightning Protection Level III	
Ground-fault monitoring / remote ground-fault monitoring	○ / ○	
Insulation monitoring	○	
Degree of protection: electronics / air duct / connection area (as per IEC 60529)	IP54 / IP34 / IP34	
General Data		
Dimensions (W / H / D)	2815 / 2318 / 1588 mm (110.8 / 91.3 / 62.5 inch)	
Weight	< 3400 kg / < 7500 lb	
Self-consumption (max. ⁴⁾ / partial load ⁵⁾ / average ⁶⁾	< 8100 W / < 1800 W / < 2000 W	
Self-consumption (standby)	< 370 W	
Internal auxiliary power supply	○ Integrated 8.4 kVA transformer	
Operating temperature range ⁸⁾	-25 °C to 60 °C / -13 °F to 140 °F	
Noise emission ⁷⁾	63.0 dB(A)	
Temperature range (standby)	-40 °C to 60 °C / -40 °F to 140 °F	
Temperature range (storage)	-40 °C to 70 °C / -40 °F to 158 °F	
Max. permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month/year) / 0% to 95%	
Maximum operating altitude above MSL ⁸⁾ 1000 m / 2000 m ¹¹⁾ / 3000 m ¹¹⁾	● / ○ / ○	● / ○ / -
Fresh air consumption	6500 m ³ /h	
Features		
DC connection	Terminal lug on each input (without fuse)	
AC connection	With busbar system (three busbars, one per line conductor)	
Communication	Ethernet, Modbus Master, Modbus Slave	
Enclosure / roof color	RAL 9016 / RAL 7004	
Supply for external loads	○ (2.5 kVA)	
Standards and directives complied with	CE, IEC / EN 62109-1, IEC / EN 62109-2, AR-N 4110, IEEE1547, UL 840 Cat. IV, Arrêté du 23/04/08	
EMC standards	IEC 55011, FCC Part 15 Class A	
Quality standards and directives complied with	VDI/VDE 2862 page 2, DIN EN ISO 9001	
● Standard features ○ Optional – not available		
Type designation	SC 2660 UP	SC 2800 UP

Technical Data	Sunny Central 2930 UP	Sunny Central 3060 UP
DC side		
MPP voltage range V_{DC} (at 35 °C / at 50 °C)	962 V to 1325 V / 1100 V	1003 V to 1325 V / 1100 V
Min. DC voltage $V_{DC, \min}$ / Start voltage $V_{DC, \text{Start}}$	934 V / 1112 V	976 V / 1153 V
Max. DC voltage $V_{DC, \max}$	1500 V	1500 V
Max. DC current $I_{DC, \max}$ / with DC coupling	3200 A / 4800 A	3200 A / 4800 A
Max. short-circuit current $I_{DC, SC}$	8400 A	8400 A
Number of DC inputs	Busbar with 26 connections per terminal, 24 double pole fused (32 single pole fused)	
Number of DC inputs with optional DC battery coupling	18 double pole fused (36 single pole fused) for PV and 6 double pole fused for batteries	
Max. number of DC cables per DC input (for each polarity)	2 x 800 kcmil, 2 x 400 mm²	
Integrated zone monitoring	○	
Available PV fuse sizes (per input)	200 A, 250 A, 315 A, 350 A, 400 A, 450 A, 500 A	
Available battery fuse size (per input)	750 A	
AC side		
Nominal AC power at $\cos \varphi = 1$ (at 35 °C / at 50 °C)	2933 kVA / 2640 kVA	3067 kVA / 2760 kVA
Nominal AC active power at $\cos \varphi = 0.8$ (at 35 °C / at 50 °C)	2346 kW / 2112 kW	2454 kW / 2208 kW
Nominal AC current $I_{AC, \text{nom}}$ (at 35 °C / at 50 °C)	2566 A / 2309 A	2566 A / 2309 A
Max. total harmonic distortion	< 3% at nominal power	< 3% at nominal power
Nominal AC voltage / nominal AC voltage range ^{1) 8)}	660 V / 528 V to 759 V	690 V / 552 V to 759 V
AC power frequency / range	50 Hz / 47 Hz to 53 Hz 60 Hz / 57 Hz to 63 Hz > 2	
Min. short-circuit ratio at the AC terminals ⁹⁾	● 1 / 0.8 overexcited to 0.8 underexcited	
Power factor at rated power / displacement power factor adjustable ^{8) 10)}		
Efficiency		
Max. efficiency ²⁾ / European efficiency ²⁾ / CEC efficiency ³⁾	98.9% / 98.7% / 98.5%	98.9% / 98.7% / 98.5%
Protective Devices		
Input-side disconnection point	DC load break switch	
Output-side disconnection point	AC circuit breaker	
DC overvoltage protection	Surge arrester, type I & II	
AC overvoltage protection (optional)	Surge arrester, class I & II	
Lightning protection (according to IEC 62305-1)	Lightning Protection Level III	
Ground-fault monitoring / remote ground-fault monitoring	○ / ○	
Insulation monitoring	○	
Degree of protection: electronics / air duct / connection area (as per IEC 60529)	IP54 / IP34 / IP34	
General Data		
Dimensions (W / H / D)	2815 / 2318 / 1588 mm (110.8 / 91.3 / 62.5 inch)	
Weight	< 3400 kg / < 7500 lb	
Self-consumption (max. ⁴⁾ / partial load ⁵⁾ / average ⁶⁾	< 8100 W / < 1800 W / < 2000 W	
Self-consumption (standby)	< 370 W	
Internal auxiliary power supply	○ Integrated 8.4 kVA transformer	
Operating temperature range ⁸⁾	−25 °C to 60 °C / −13 °F to 140 °F	
Noise emission ⁷⁾	63.0 dB(A)	
Temperature range (standby)	−40 °C to 60 °C / −40 °F to 140 °F	
Temperature range (storage)	−40 °C to 70 °C / −40 °F to 158 °F	
Max. permissible value for relative humidity (condensing / non-condensing)	95% to 100% (2 month/year) / 0% to 95%	
Maximum operating altitude above MSL ⁸⁾ 1000 m / 2000 m ¹¹⁾ / 3000 m ¹¹⁾	● / ○ / −	
Fresh air consumption	6500 m³/h	
Features		
DC connection	Terminal lug on each input (without fuse)	
AC connection	With busbar system (three busbars, one per line conductor)	
Communication	Ethernet, Modbus Master, Modbus Slave	
Enclosure / roof color	RAL 9016 / RAL 7004	
Supply for external loads	○ (2.5 kVA)	
Standards and directives complied with	CE, IEC / EN 62109-1, IEC / EN 62109-2, AR-N 4110, IEEE1547, UL 840 Cat. IV, Arrêté du 23/04/08	
EMC standards	IEC 55011, FCC Part 15 Class A	
Quality standards and directives complied with	VDI/VDE 2862 page 2, DIN EN ISO 9001	
● Standard features ○ Optional – not available		
Type designation	SC 2930 UP	SC 3060 UP


- 1) At grid voltage lower than nominal AC voltage, the nominal AC power decreases in the same proportion
2) Efficiency measured without internal power supply
3) Efficiency measured with internal power supply
4) Self-consumption at rated operation
5) Self-consumption at < 75% P_n at 25 °C
6) Self-consumption averaged out from 5% to 100% P_n at 25 °C


- 7) Sound pressure level at a distance of 10 m
8) Values apply only to inverters. Permissible values for SMA MV solutions from SMA can be found in the corresponding data sheets.
9) A short-circuit ratio of < 2 requires a special approval from SMA
10) Depending on the DC voltage
11) Earlier temperature-dependent de-rating and reduction of DC open-circuit voltage

SYSTEM DIAGRAM

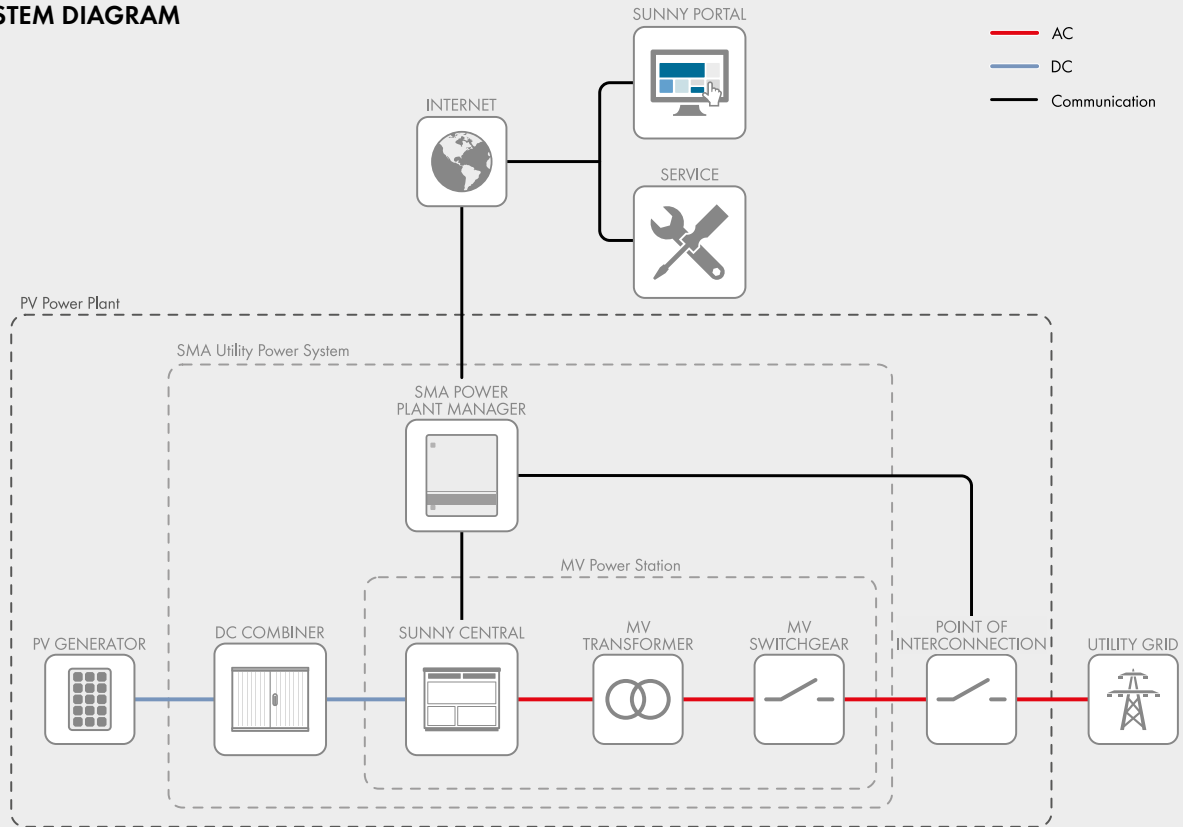

TEMPERATURE BEHAVIOR (at 1000 m)

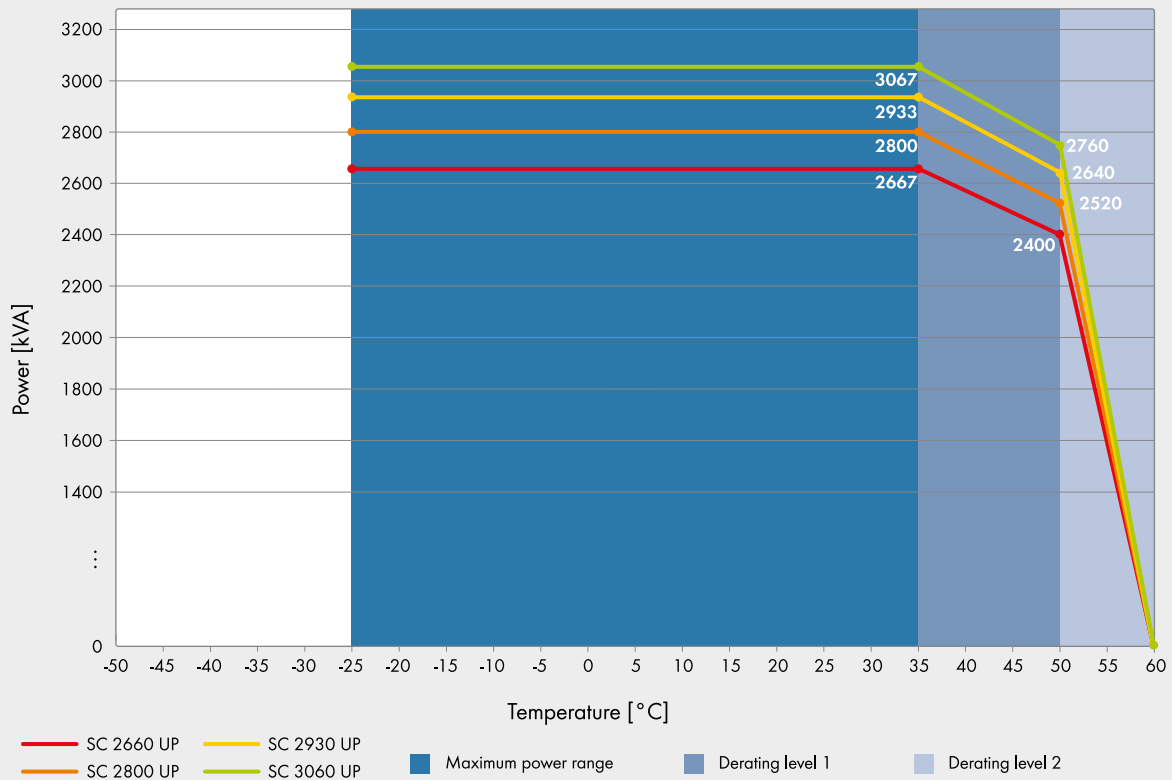


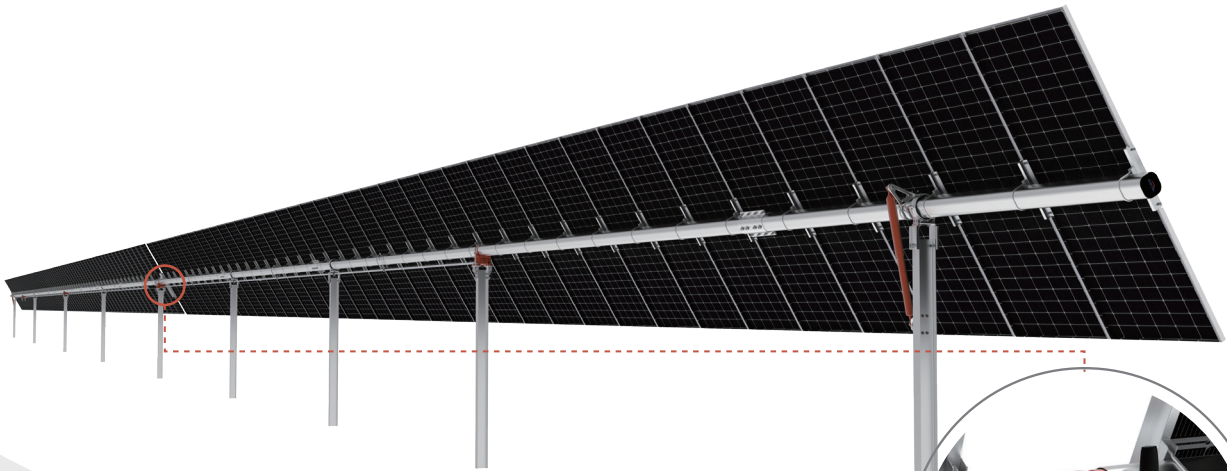

Skyline II (ATH-SKL-S2-S155)

- Comprehensive Tracker System Solution with High Adaptability for Complex Scenarios

FEATURES



Strong adaptability to 20%
N-S slope terrain
Unlimited E-W



Low tilting Stow Angle
Less wind load, more reliable



Higher wind load available
More power generation



Easy to install
Installation time 13% reduction



Synchronous multi-point drive
Robust Transmission Design
Stability increased by 200%




Fully compatible with cleaning
robot
Maximizing O&M efficiency

TRACKER SPECIFICATIONS

▶ Tracker Type	>> Independent horizontal single-axis tracker
▶ Tracking Range	>> $\pm 60^\circ$
▶ Drive Type	>> Slew drive/Synchronous multi-point design
▶ Modules per Tracker	>> Up to 120 modules per tracker
▶ System Voltage	>> 300 VDC-1500 VDC
▶ Foundation Options	>> Ramming piles/Cast-in-place concrete piles/Concrete piles or ballasts
▶ Structure Material	>> Hot dipped galvanized steel/Pre-galvanized steel/Zn-Al-Mg coated steel
▶ Daily Energy Consumption	>> Typical 0.04kWh
▶ Standard Design Wind Speed	>> 156mph (70m/s) per ASCE7-10, higher wind load available
▶ Modules Supported	>> All commercially available modules
▶ Operation Temperature Range	>> -30°C to 60°C

TRACKER CONTROLLER SPECIFICATIONS

▶ Control Algorithm	>> Astronomical algorithms + Tilt sensor closed-loop control
▶ Tracking Accuracy	>> $\leq 2^\circ$
▶ Backtracking	>> Support terrain adaptive intelligent algorithm
▶ Communication Options	>> LoRa wireless/RS 485 cable/Bluetooth
▶ Other Special Modes	>> Snow, flood and hail protection for customer selection
▶ Controller's Power Supply	>> Default string power supply, AC / self-power as option
▶ Flood Mode	>> Tracker flat (optional)
▶ Snow Mode	>> Tracker at max tilt (optional)
▶ Wind Stow Mode	>> Low tilt stow angle

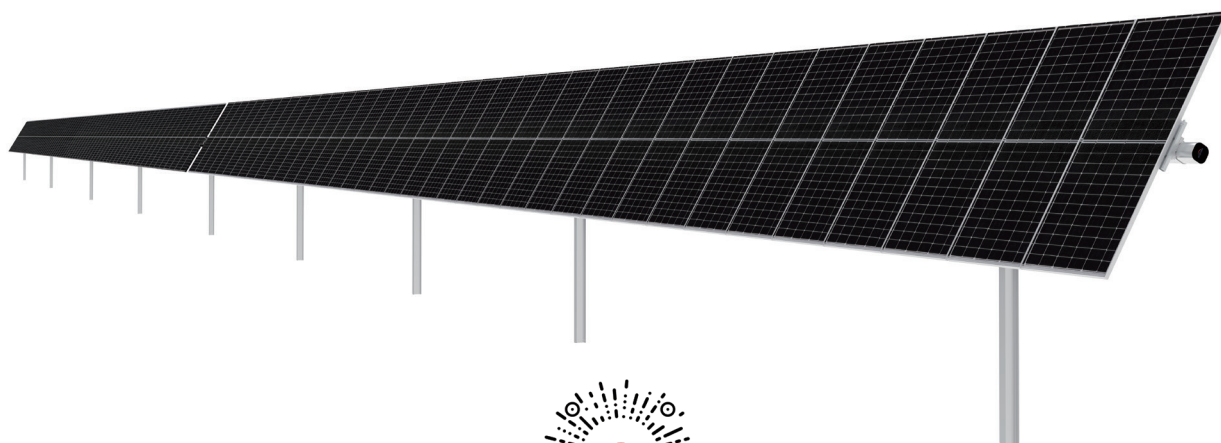



BIFACIAL DUAL GLASS MONOCRYSTALLINE MODULE

PRODUCT: TSM-DEG21C.20

POWER RANGE: 645-665W

665W

MAXIMUM POWER OUTPUT

0~+5W

POSITIVE POWER TOLERANCE

21.4%

MAXIMUM EFFICIENCY



High customer value

- Lower LCOE (Levelized Cost Of Energy), reduced BOS (Balance of System) cost, shorter payback time
- Lowest guaranteed first year and annual degradation;
- Designed for compatibility with existing mainstream system components



High power up to 665W

- Up to 21.4% module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping effect, lower series resistance and improved current collection



High reliability



- Minimized micro-cracks with innovative non-destructive cutting technology
- Ensured PID resistance through cell process and module material control
- Resistant to harsh environments such as salt, ammonia, sand, high temperature and high humidity areas
- Mechanical performance up to 5400 Pa positive load and 2400 Pa negative load



High energy yield

- Excellent IAM (Incident Angle Modifier) and low irradiation performance, validated by 3rd party certifications
- The unique design provides optimized energy production under inter-row shading conditions
- Lower temperature coefficient (-0.34%) and operating temperature
- Up to 25% additional power gain from back side depending on albedo

Trina Solar's Vertex Bifacial Dual Glass Performance Warranty

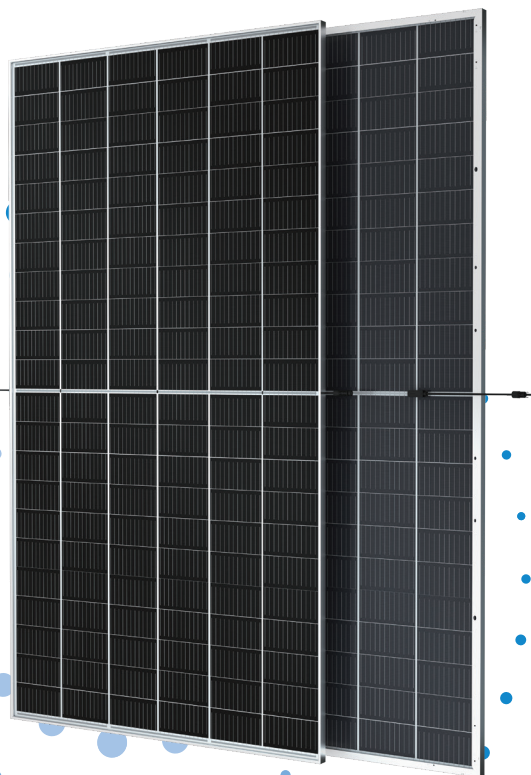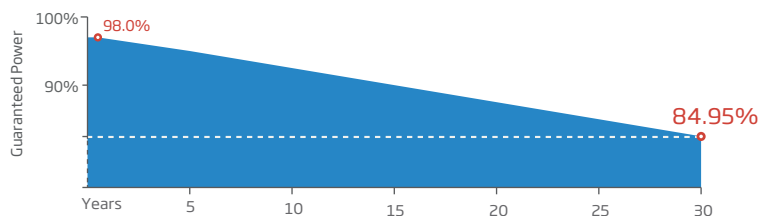


Comprehensive Products and System Certificates




IEC61215/IEC61730/IEC61701/IEC62716/UL61730
 ISO 9001: Quality Management System
 ISO 14001: Environmental Management System
 ISO14064: Greenhouse Gases Emissions Verification
 ISO45001: Occupational Health and Safety Management System




DIMENSIONS OF PV MODULE(mm)

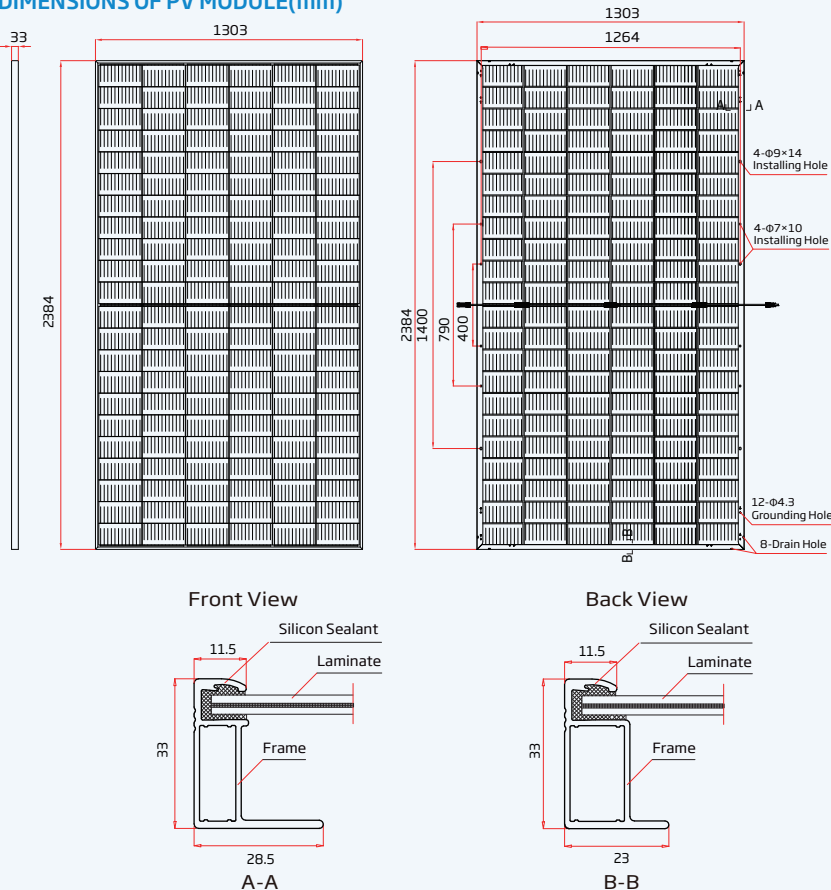


I-V CURVES OF PV MODULE(650 W)

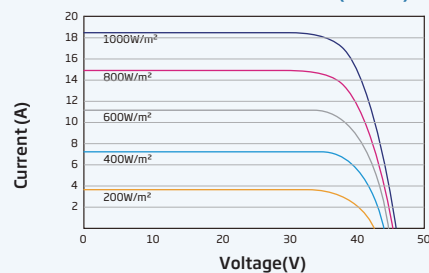

P-V CURVES OF PV MODULE(650W)

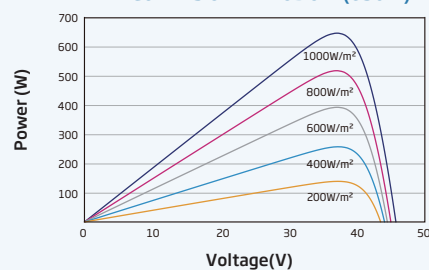

I-V CURVES OF PV MODULE(650 W)

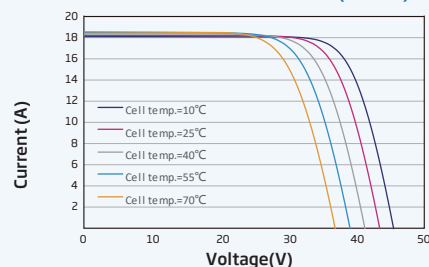

ELECTRICAL DATA (STC)

Peak Power Watts-P _{MAX} (Wp)*	645	650	655	660	665
Power Tolerance-P _{MAX} (W)	0 ~ +5				
Maximum Power Voltage-V _{MPP} (V)	37.5	37.7	37.9	38.1	38.3
Maximum Power Current-I _{MPP} (A)	17.23	17.27	17.31	17.35	17.39
Open Circuit Voltage-V _{OC} (V)	45.3	45.5	45.7	45.9	46.1
Short Circuit Current-I _{SC} (A)	18.31	18.35	18.40	18.45	18.50
Module Efficiency η _m (%)	20.8	20.9	21.1	21.2	21.4

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%.

Electrical characteristics with different power bin (reference to 10% Irradiance ratio)

Total Equivalent power -P _{MAX} (Wp)	690	696	701	706	712
Maximum Power Voltage-V _{MPP} (V)	37.5	37.7	37.9	38.1	38.3
Maximum Power Current-I _{MPP} (A)	18.44	18.48	18.52	18.56	18.60
Open Circuit Voltage-V _{OC} (V)	45.3	45.5	45.7	45.9	46.1
Short Circuit Current-I _{SC} (A)	19.59	19.63	19.69	19.74	19.79
Irradiance ratio (rear/front)	10%				

Power Bifaciality: 70±5%.

ELECTRICAL DATA (NOCT)

Maximum Power-P _{MAX} (Wp)	488	492	495	499	504
Maximum Power Voltage-V _{MPP} (V)	34.9	35.1	35.2	35.4	35.6
Maximum Power Current-I _{MPP} (A)	13.98	14.01	14.05	14.10	14.16
Open Circuit Voltage-V _{OC} (V)	42.7	42.9	43.0	43.2	43.4
Short Circuit Current-I _{SC} (A)	14.75	14.79	14.83	14.87	14.91

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline
No. of cells	132 cells
Module Dimensions	2384×1303×33 mm (93.86×51.30×1.30 inches)
Weight	38.3 kg (84.4 lb)
Front Glass	2.0 mm (0.08 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	POE/EVA
Back Glass	2.0 mm (0.08 inches), Heat Strengthened Glass (White Grid Glass)
Frame	33mm(1.30 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm² (0.006 inches²), Portrait: 350/280 mm(13.78/11.02 inches) Length can be customized
Connector	MC4 EV02 / TS4*

*Please refer to regional datasheet for specified connector.

TEMPERATURE RATINGS

NOCT(Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P _{MAX}	-0.34%/°C
Temperature Coefficient of V _{OC}	-0.25%/°C
Temperature Coefficient of I _{SC}	0.04%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC) 1500V DC (UL)
Max Series Fuse Rating	35A

WARRANTY

12 year Product Workmanship Warranty
30 year Power Warranty
2% first year degradation
0.45% Annual Power Attenuation

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 33 pieces
Modules per 40' container : 594 pieces